

The copying, distribution and utilization of this document as well as the communication of its contents and parts of its contents to others without expressed authorization (in written form) is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of patent and utility model registration.
This legend shall be included on any kind of reproduction of this document.

Weitergabe sowie Vervielfältigung dieses Dokumentes, Verwertung und Mitteilung seines Inhaltes und Teilen davon sind verboten, soweit nicht ausdrücklich schriftlich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patent- und Gebrauchsmustereintragung vorbehalten.
Dieser Text muss auf jeglicher Reproduktion dieses Dokumentes aufscheinen.

Front fork setting list



Article number:	24187N67	System:	4CS
Modeldescription: (without year declaration)	250/350 SIXDAYS-F 250/350 HUSABERG FE	Type:	4860 MXMA

	<i>Driving comfort</i>	STANDARD	<i>Driving sport</i>	<i>max. payload</i>
Compression damping (clicks open)	15	13	11	
Rebound damping (clicks open)	15	13	11	
Reservoir-Version:	S2			

air chamber STD (no oil betw.inner-/outertube)	100 mm	Oil type	4860 1166	
oil capacity	635 ml	Oil viscosity	4 SAE	
Reservoir Spring Art.No.	4860 1108	16 N/mm	Wheel travel	292 mm
Res.-Spring Spacer Art.No.	4860 1032	2 Stk./pcs.	Front fork length	932 mm

Spring	Riders weight	Spring rate	Spring description	Spring length with preload spacer	Part number
<i>Spring softer</i>	65-75 kg	4.0 N/mm	438.465.00.40	472 mm	9141 0083
Spring STANDARD	75-85 kg	4.2 N/mm	438.465.00.42	472 mm	9141 0084
<i>Spring harder</i>	85-95 kg	4.4 N/mm	438.465.00.44	472 mm	9141 0085

Base Valve Setting			
Qty	Compression	Qty	Hydrostop
1	Ø 6 x 18 x 0.40	8	Ø 6 x 26 x 0.15
1	Ø 6 x 14 x 0.15	2	Ø 6 x 18 x 0.25
1	Ø 6 x 16 x 0.15	1	Ø 6 x 18 x 0.20
1	Ø 6 x 18 x 0.15		
1	Ø 6 x 20 x 0.15		
1	Ø 6 x 22 x 0.15		
1	Ø 6 x 26 x 0.15		
9	Ø 6 x 28 x 0.15		


Mid Valve Setting			
Qty	Compression	Qty	Rebound
3	Ø 8 x 10 x 0.20	1	Ø 6 x 14 x 0.10
1	Ø 8 x 10 x 0.10	2	Ø 6 x 14 x 0.25
4	Ø 8 x 17 x 0.10	1	Ø 6 x 8.5 x 0.30
		1	Ø 6 x 12 x 0.10
		1	Ø 6 x 14 x 0.10
		1	Ø 6 x 15 x 0.10
		1	Ø 6 x 16 x 0.10
		1	Ø 6 x 12 x 0.10
		1	Ø 6 x 17 x 0.10

Hydrostop Art.No.	4860 1279
Piston Art.No.	4860 0984

Check valve lift height	0.45 mm
Check valve spring Art.No.	4860 0382
Piston Art.No.	4860 0985
no mm	
Needle red Art.No.	4860 1123
Needle white Art.No.	4860 0999

Legend:	TBD = to be defined	- = no comment
----------------	---------------------	----------------

Note: PUSHER CONE: Rebound (R/S, red) Tap-sides and Compression (L/S, white) Needle-sides mounted

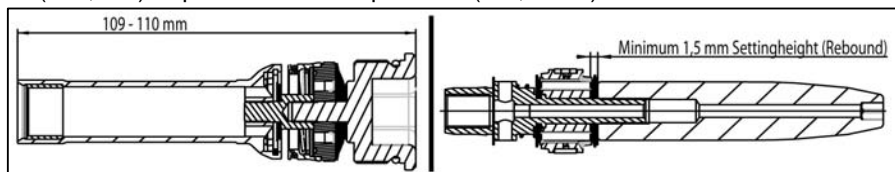

				Draftsman:	Erbschwendtner Raimund
				Creation date:	2012-11-28
Index	Date	Name	Modification description		

Release stamp

